
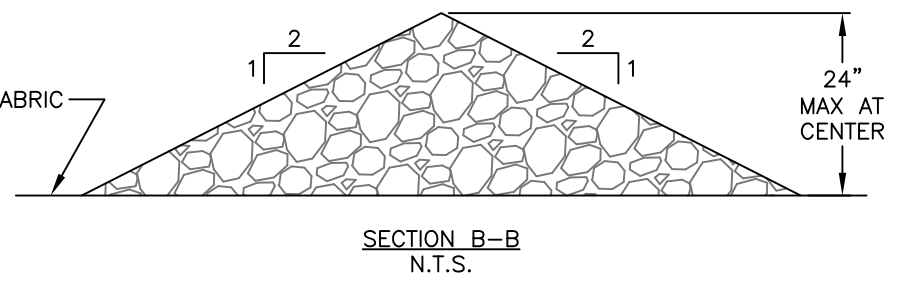
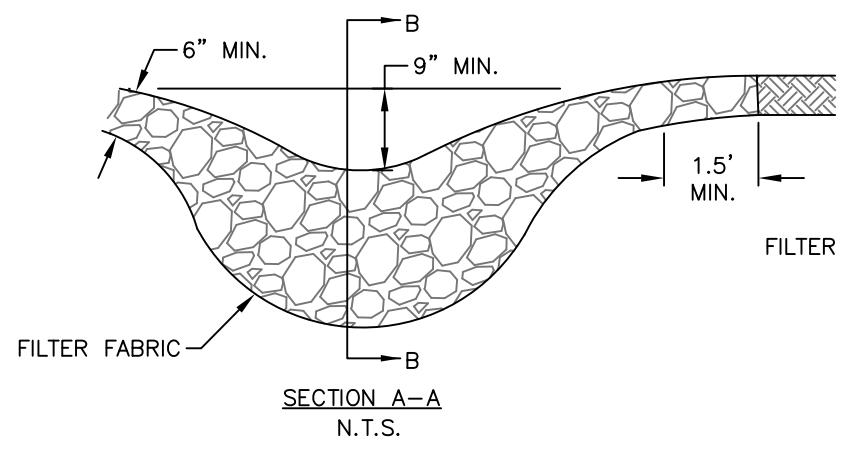
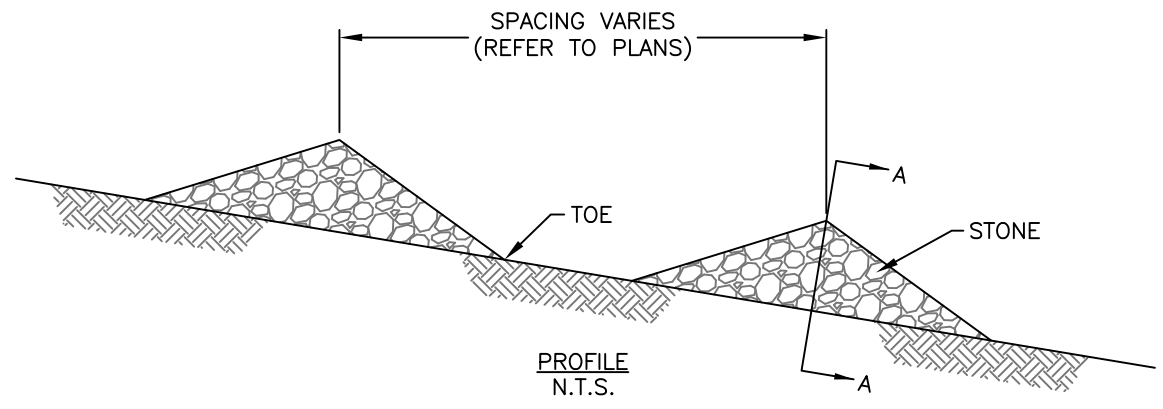


\\SERVER\User\Folders\Town Projects\AutoCAD Projects\Non-Town Wide\Details\Erosion Control\EC-01\TemporaryCheckDam.dwg



CONSTRUCTION SPECIFICATIONS

1. STONE WILL BE PLACED ON A FILTER FABRIC FOUNDATION TO THE LINES, GRADES AND LOCATIONS SHOWN IN THE PLAN.
2. SET SPACING OF CHECK DAMS AS INDICATED ON GRADING AND EROSION CONTROL PLAN.
3. EXTEND THE STONE A MINIMUM OF 1.5 FEET BEYOND THE DITCH BANKS TO PREVENT CUTTING AROUND THE DAM.
4. PROTECT THE CHANNEL DOWNSTREAM OF THE LOWEST CHECK DAM FROM SCOUR AND EROSION WITH STONE OR LINER AS APPROPRIATE.
5. ENSURE THAT CHANNEL APPURTENANCES SUCH AS CULVERT ENTRANCES BELOW CHECK DAMS ARE NOT SUBJECT TO DAMAGE OR BLOCKAGE FROM DISPLACED STONES.
6. GRADED STONE SHALL BE BETWEEN 2 TO 15 INCHES IN SIZE, NYSOT ITEM NO. 620.03.

 TOWN OF HENRIETTA	TEMPORARY CHECK DAM	
	SCALE: N.T.S.	EC-01
	DATE: 04/09/2013	