



\\0server\user_folders\Town Projects\AutoCAD Projects\Non-Town Wide\Details\Roadway\RD-09\ConcreteGutter.dwg

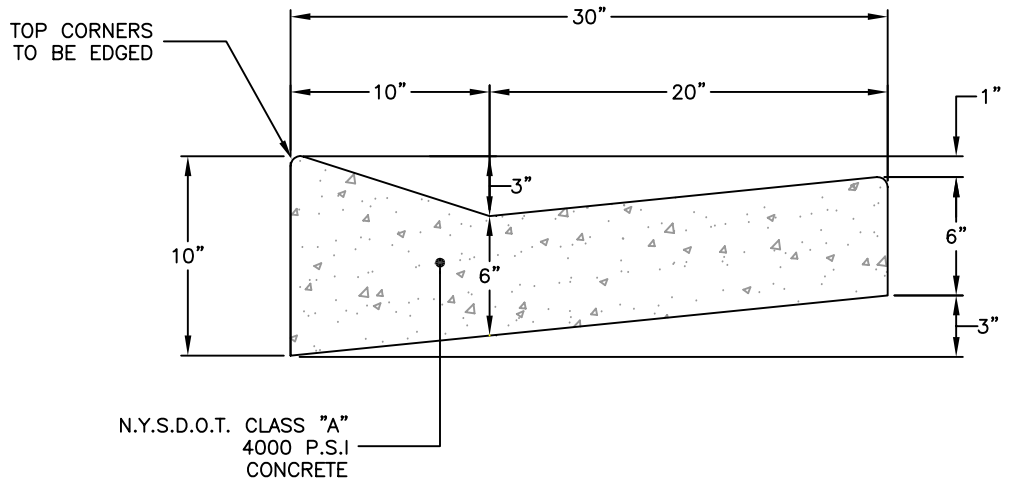

NOTES:

1. CONTRACTION JOINTS TO BE AT 10' INTERVALS AND SHALL BE FORMED OR SAW CUT TO A DEPTH OF 1/2" BELOW THE SURFACE OF THE GUTTER.
2. EXPANSION JOINTS TO BE AT 100' INTERVALS AND SHALL BE FORMED WITH 1/2" WIDE PREMOLDED BITUMINOUS JOINT FILLER. THE FILLER MATERIAL SHALL BE CUT TO CONFORM TO THE CROSS-SECTION OF THE GUTTER.
3. EXPANSION JOINTS AND FORMED CONTRACTION JOINTS ARE TO BE EDGED WITH CONCRETE FINISHING TOOLS.

| | | |
|--|-------------------------|--------------|
|  TOWN OF HENRIETTA | CONCRETE GUTTER | |
| | SCALE: N.T.S. | |
| | DATE: 03/15/2012 | |
| | | RD-09 |