

\\0server\user folders\Town Projects\AutoCAD Projects\Non-Town Wide\Details\Sanitary\M-4\Tree&ShrubPlanting.dwg

STAKING:  
 FOR ALL TREES SMALLER  
 4" CAL AND EVERGREENS  
 5'-12' HT. REMOVE STAKE  
 ONE YEAR AFTER PLANTING.

GUYING:  
 FOR ALL TREES LARGER  
 4" CAL. AND EVER-  
 GREENS LARGER THAN 12'

SET TRUNK PLUMB  
 LEAN SLIGHTLY INTO  
 PREVAILING WIND

GARDEN HOSE

2 STRANDS NO.12 GALV.  
 PLIABLE STEEL WIRE  
 (TWIST TO TIGHTEN  
 NOT OVERTIGHTEN,  
 ALLOW FOR SOME SWAY)

2"x2" STAKE (THREE WAY)

WEED BARRIER

3" MULCH  
 (TYP. SEE NOTE 3)

OPTION FOR AREAS  
 WITH GOOD DRAINAGE

2 STRANDS NO.12 GALV. GUY  
 WIRE. PROVIDE (3) PER  
 TREE EQUALLY SPACED  
 WITH TURNBUCKLES (1/2"x6")

WRAP TRUNK IN 6" TO 8"  
 STRIPS RODENT GUARD (A.O.B.E.)  
 REMOVE FOLLOWING SPRING  
 (NO KRAFT PAPER WRAP WILL  
 BE PERMITTED)


LOAMY TOPSOIL MIXTURE  
 4 PARTS TOPSOIL 1 PART  
 ALL-GRO COMPOST MIX

FLAGGING

60° FINISHED GRADE

2"x4"x48" WOOD  
 STAKES-NOTCHED

UNDISTURBED SOIL

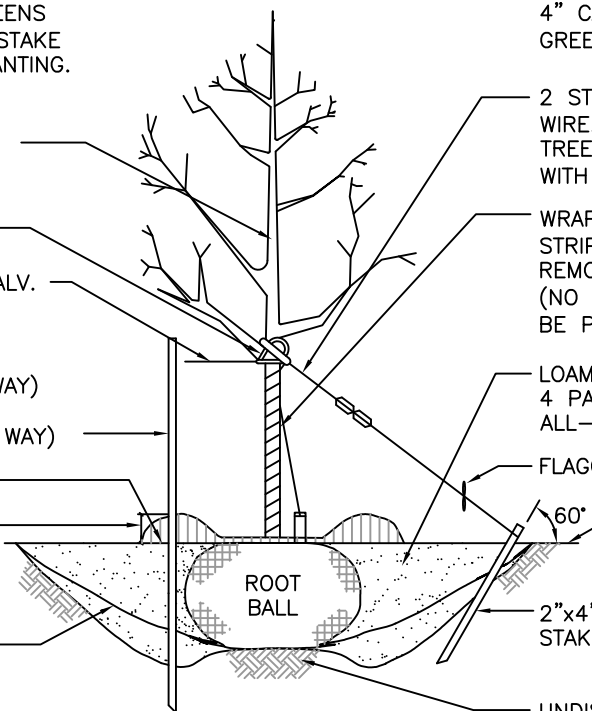


NOTES:

1. USE 8' STAKES-DRIVE 48" BELOW GROUND.
2. ROOT COLLAR TO BE SLIGHTLY ABOVE SURROUNDING GRADE.
3. MULCH CAN NOT BE MORE THAN 1" THICK AT ROOT COLLAR EXTENDING OUT AT LEAST 6" FROM THE BARK, THEN IT CAN BE THICKENED.
4. MULCH IS TO BE PLACED 3" TO 6" AWAY FROM THE TRUNK.

TREE PLANTING DETAIL

N.T.S.

 TOWN OF HENRIETTA	<b>TYPICAL TREE PLANTING DETAIL</b>	
	SCALE: N.T.S.	
	DATE: 11/10/2011	
	<b>M-4b</b>	