



\\0server\user\folders\Town Projects\AutoCAD Projects\Non-Town Wide\Details\Roadway\RD-13b\SidewalkRampTypeB.dwg

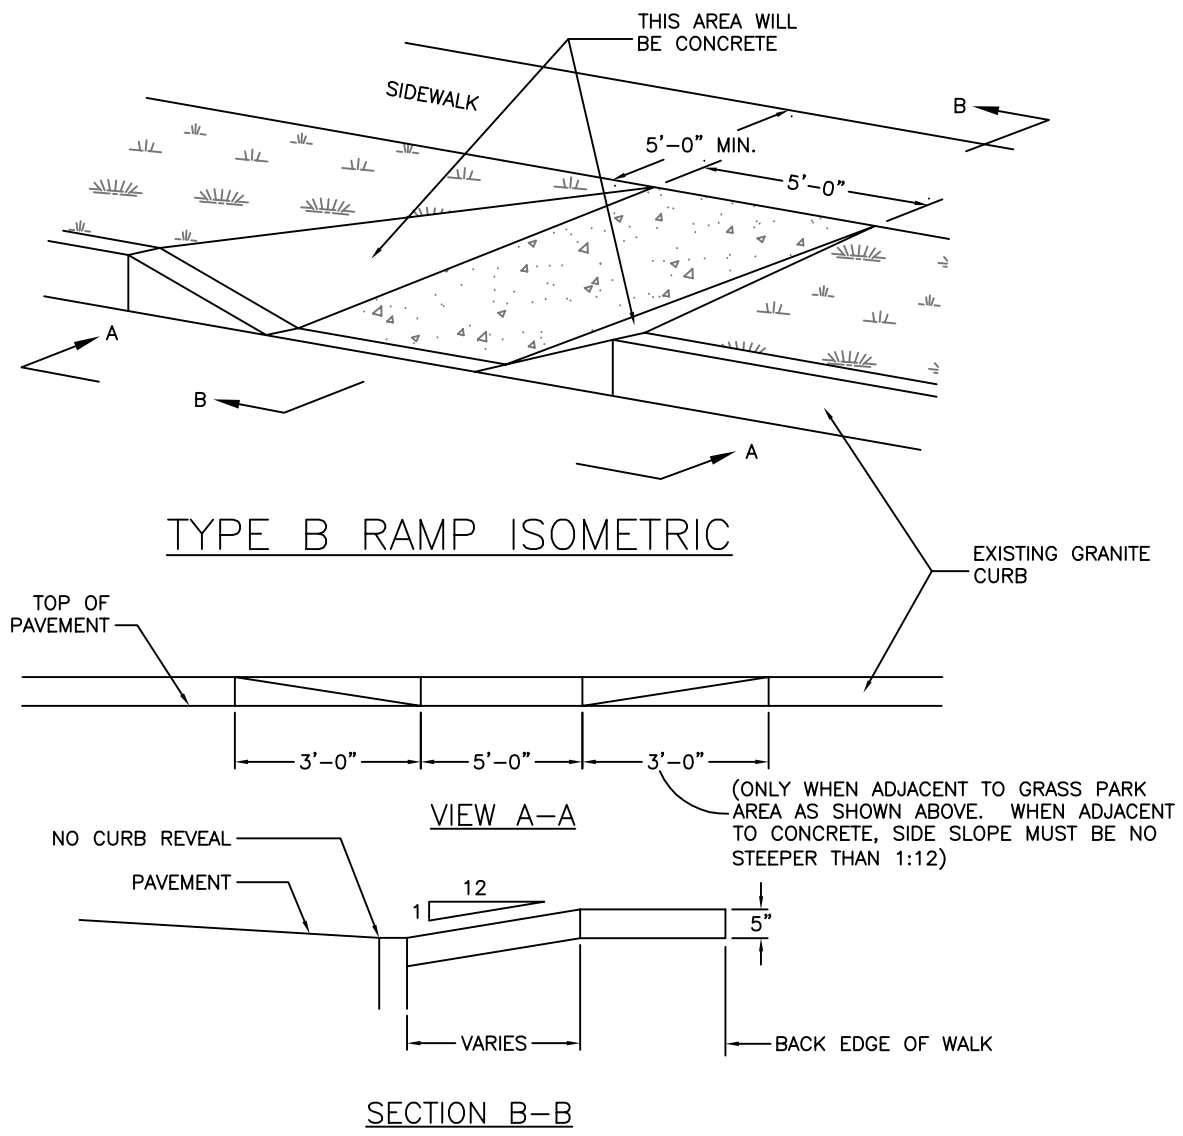

**NOTES:**

1. THE MAXIMUM SLOPE OF A SIDEWALK RAMP IS 1:12. IF SPACE LIMITATIONS ON EXISTING SITES PROHIBIT THE USE OF 1:12, THE FOLLOWING SLOPES AND RISES MAY BE USED:
  - A. STEEPER THAN 1:12 (8.33%), BUT NO STEEPER THAN 1:10 (10%) 6" MAXIMUM RISE, 5' MAXIMUM RUN.
  - B. STEEPER THAN 1:10 (10%), BUT NO STEEPER THAN 1:8 (12.5%) 3" MAXIMUM RISE, 2' MAXIMUM RUN.
  - C. A SLOPE STEEPER THAN 1:8 (12.5%) IS NOT ALLOWED.
2. THE SURFACE OF ALL SIDEWALK RAMPS IS TO BE STABLE, FIRM, AND SLIP-RESISTANT. (i.e. COURSE BROOM FINISH PERPENDICULAR TO THE RAMP SLOPE IS ACCEPTABLE)
3. SIDEWALK RAMP LANDING PAD IS TO BE 5" THICK.



<b>SIDEWALK RAMP TYPE B</b>	
SCALE: N.T.S.	<b>RD-13b</b>
DATE: 03/14/2012	